



# Symbol SE1524ER

## OEM Scan Engines



### FEATURES

**High-performance scan engine with fuzzy logic for reading poorly printed and low contrast across the entire decode range**

Offers excellent scanning performance on all types of 1D bar codes

**Working range up to 45 ft./9.1 m for 100 mil reflective symbols**

Enables advanced long range scanning capability for OEM devices

**Reads 7.5 mil bar codes from 2 in. to 22 in.**

Provides an extremely versatile working range

**One of the best working ranges — near and far — in the smallest size**

The Symbol SE1524ER extended range scan engine provides high-performance bar code scanning in the smallest possible package. It's built for OEM applications that require easy targeting and capture of bar codes from short or long distances such as in multi-level warehouse environments. Superior first-time read rates, working range, fuzzy logic technology and affordability all combine to deliver a versatile scan engine for your OEM applications. The Symbol SE1524ER is both durable and reliable to offer premium long-range scanning performance in the toughest environments.

**Built for versatility and performance**

The Symbol SE1524ER scan engine gives you one of the most impressive working ranges in the industry, with the ability to read from 2 inches to

22 inches on a 7.5 mil and over 40 feet on a 100 mil reflective label. Whether scanning pallet labels on warehouse racks or shipping labels on the dock, the Symbol SE1524ER is an excellent choice for those applications that require both long- and short-range scanning.

The Symbol SE1524ER also supports "Aim" mode, and its bright, 650 nanometer laser diode provides a highly visible scan line. The Symbol SE1524ER uses fuzzy logic decode processing for fast, accurate reading of the poorest quality bar codes. Together, these features ensure that users accurately target bar codes for easy, intuitive data capture.

For more information, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the Web at [www.motorola.com/oem](http://www.motorola.com/oem)

**SPECIFICATION SHEET**

SYMBOL SE1524ER  
OEM scan engines

# Symbol SE1524ER Specifications

**Special "Aim" mode**  
Makes scanning from a distance easy and intuitive

**650 nm bright laser diode scanning**  
Easy-to-see scan line is suitable for long distance

**Metal chassis**  
Delivers the industry's highest shock rating for commercial, industrial or retail applications

**Simple serial interface (SSI) software**  
Communication is easy between the scan engine software and the host


**Supports 3.3V**  
Gives an extended life to your mobile applications with minimum power consumption

**Single-board design**  
Compact, durable and reliable

Physical Characteristics	
Dimensions (max.):	0.8 in. H x 1.77 in. W x 1.375 in. D (nominal) 2.03 cm H x 4.48 cm W x 3.49 cm D (nominal)
Weight:	1.4 oz./40.0 g
Performance Characteristics	
Light Source:	Visible Laser Diode 650 nm
Scan Rate:	35 (± 5) scans/sec (bi-directional)
Scan Angle:	13.5° ± 0.7°
Scan Patterns:	Linear
Minimum Print Contrast:	Minimum 25% absolute dark/light reflectance measured at 650 nm
Symbologies:	UPC/EAN, Code 128, UCC.EAN128, RSS, Code 39, Code 93, I 2 of 5, Discrete 2 of 5, Codabar, MSI
Programmable Parameters:	Laser On Time, Aim Duration, Power Mode, Trigger Mode, Bi-directional Redundancy, Symbology Types/Lengths, Data Formatting, Serial Parameters, Beeper Tone, Scan Angle
Interfaces:	12 position ZIF connector. Symbol Standard SSI Interface with logic level serial data communications plus trigger, beeper and decode LED signals

User Environment	
Ambient Light:	Artificial: 450 ft. candles (4,844 Lux) Sunlight: 8,000 ft. candles (86,112 Lux)
Operating Temp.:	-22° to 140° F (-30° to 60° C)
Storage Temp.:	-40° to 158° F (-40° to 70° C)
Humidity:	5% to 95% non-condensing
Power:	Input Voltage: 3.3 VDC ± 10% Scanning Current: 210 mA typical / 240 mA max. Motor on Current: 150 mA typical / 170 mA max. Standby Current: 60 uA
Shock:	2,000 G
Regulatory	
Laser Classification:	Intended for use in CDRH Class II and IEC Class 2 devices
Electrical Safety:	UL, VDE, and CUL recognized component laser
Environmental:	RoHS-compliant

**SE1524ER Decode Zone**

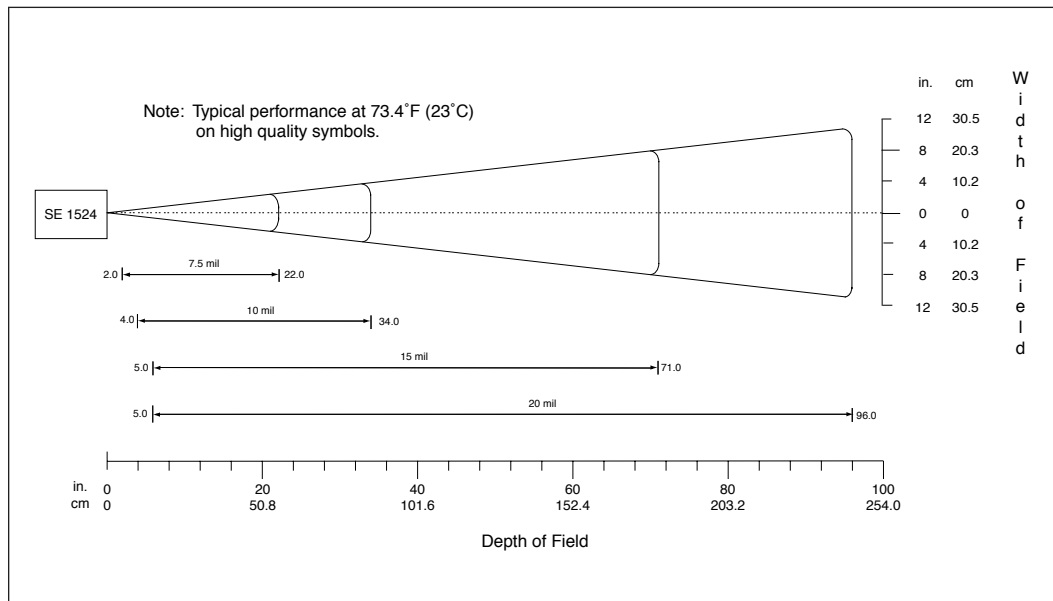

motorola.com

Part number SS-SE1524ER. Printed in USA 07/07. MOTOROLA and the Stylized M Logo and Symbol and the Symbol Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2007 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.